



DC150-12

DEEP CYCLE MAINTENANCE - FREE SEALED AGM BATTERY



Electrical Specifications

Nominal Voltage	12V
C20	150Ah
C10	135Ah
C5	123Ah
CCA	900A
CA or MCA	1050A
HPCA	1500A (5sec)
Reserve Capacity @25 amps	295 min
Reserve Capacity @75 amps	80 min
Recommended Charge Current	14A - 36A
Maximum Charge Current	50A


Mechanical Specifications

Total Height (with terminals)	273 mm (10.75 inch)
Total Height (case only)	269 mm (10.59 inch)
Length	327 mm (12.87 inch)
Width	182 mm (7.17 inch)
Weight (approx.)	42.6 kg (93.92 lbs)
Terminal Type	M8
Battery Case	ABS Plastic (Flame Res. Rating UL94-HB)

Duration of discharge vs. Discharge current

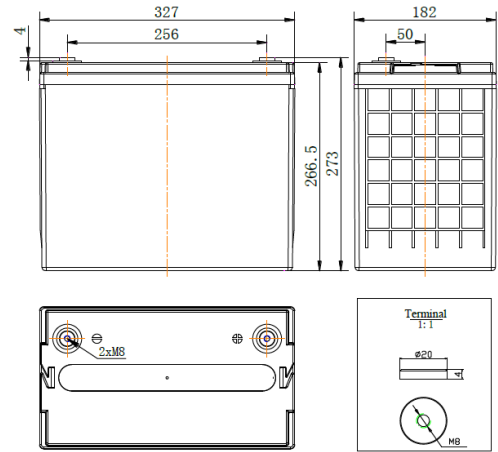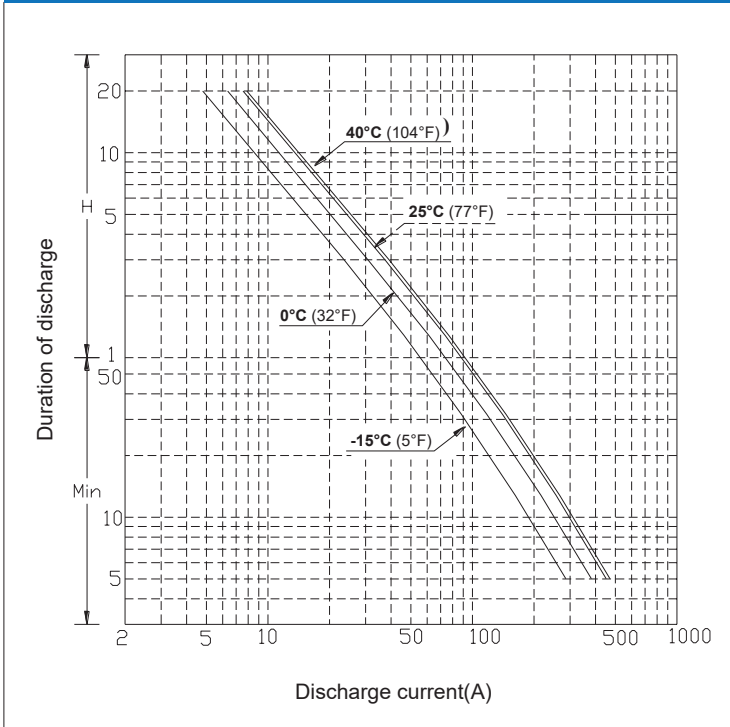

Discharge characteristics 25°C (77°F)

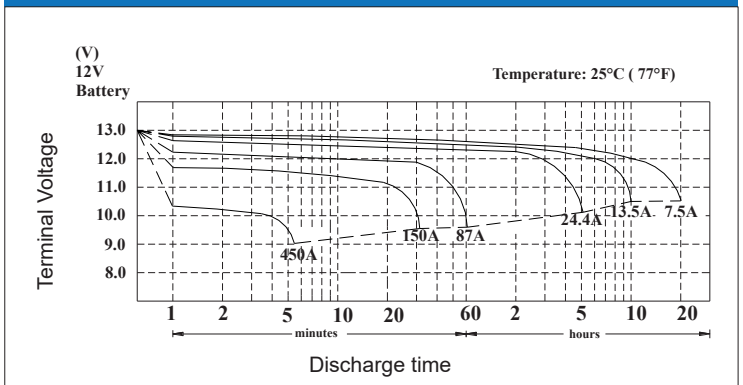


Constant Current Discharge Rating Amperes @ 25°C (77°F)

Cut off voltage V/cell 1	15M	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	220	144	105	85.5	51.2	34.0	24	16.3	13.5	11.5	7.5	6.35


All listed ratings are @ 100% SoC, T=25°C (77°F), 1.75VPC unless otherwise specified. Specifications listed are for estimation purpose only. Battery performance can vary depending on application. Battery design subject to change.




Temperature vs Capacity

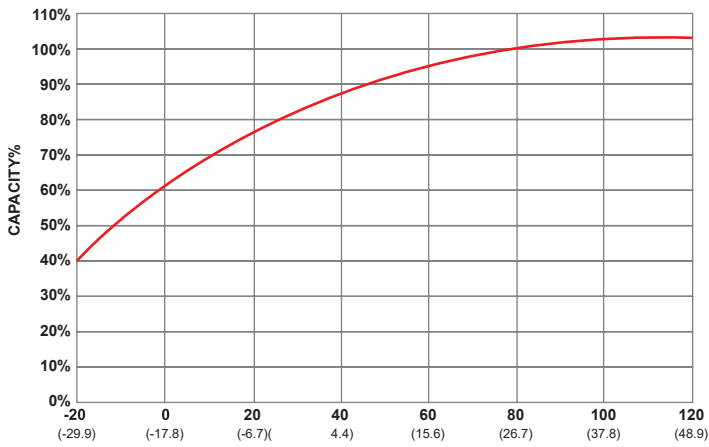


State of Charge (SOC) vs Open Circuit Voltage (OCV)

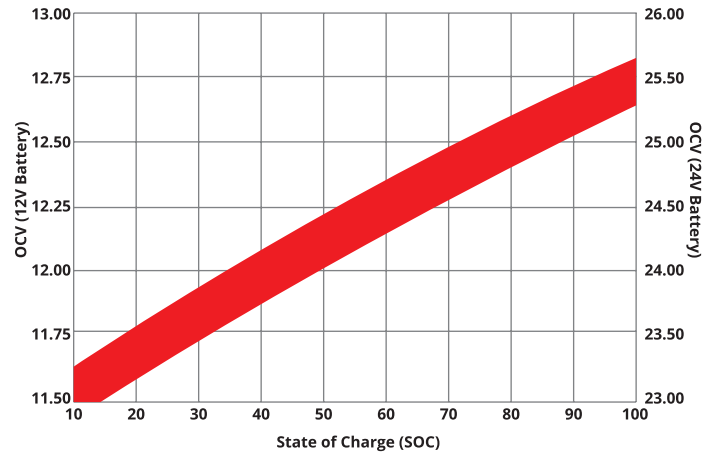

Cycle Life vs Depth of Discharge (DOD)

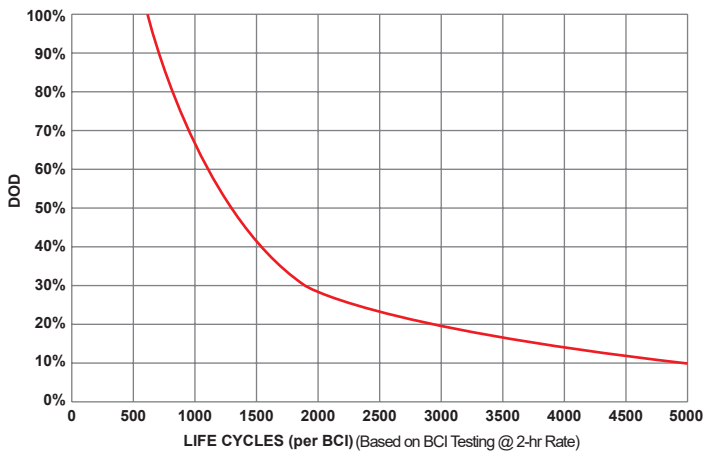

Self Discharge vs Time/Temperature

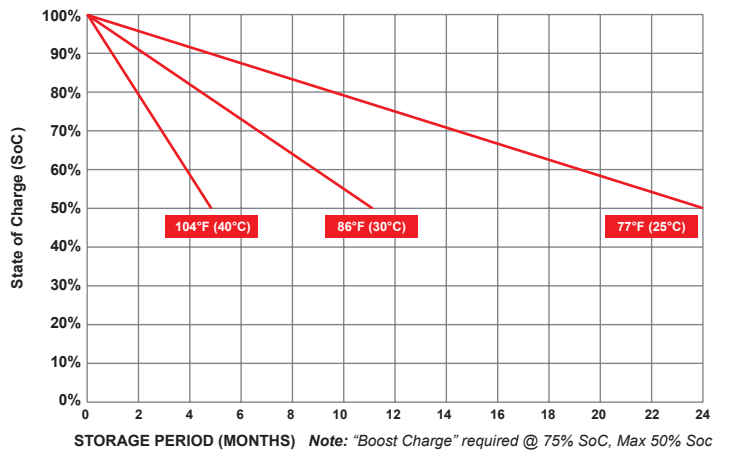

Temperature Range Specifications

Condition	Recommended	Maximum	Recommended	Maximum
Storage	-15°C to 50°C	-40°C to 71°C	5°F to 122°F	-40°F to 160°F
Operation	-15°C to 40°C	-40°C to 71°C	5°F to 104°F	-40°F to 160°F
Charge with TC*	-15°C to 50°C	-40°C to 71°C	5°F to 122°F	-40°F to 160°F
Charge w/o TC*	0°C to 40°C	-15°C to 50°C	32°F to 104°F	5°F to 122°F

*TC = Temperature Compensation

Charge Voltages

Charge Stage	Battery Voltages			
	12V	24V	36V	48V
Bulk	14.7V	29.4V	44.1V	58.8V
Absorption	14.7V	29.4V	44.1V	58.8V
Float	13.6V	27.2V	40.8V	54.6V

TC Factor: (-4mV°C/cell) or (-2mV°F/cell)

Terminal Torque Specs

Terminal Type	ft-lbs	in-lbs	nm
AP, DT (ap), M6, M6M (Stud), TP07 (AP), TP08 (AP)	4.2 - 0.6	50 - 70	5.6 - 7.9
FR45	6.0 - 7.5	70 - 90	7.9 - 10.1
M8	7.1 - 8.0	85 - 95	9.6 - 10.7
DT (Stud), M10M (Stud)	9.2 - 10.4	110 - 125	12.2 - 14

All listed ratings are @ 100% SoC, T=25°C (77°F), 1.75VPC unless otherwise specified.

Specifications listed are for estimation purpose only. Battery performance can vary depending on application. Battery design subject to change.